


S962CM2T

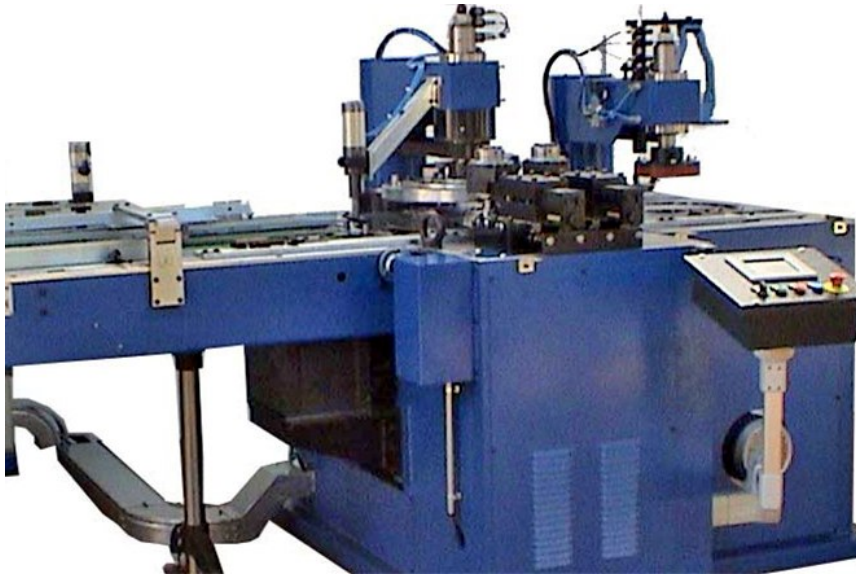

CURLING LINING MACHINE

Automatic double station curling lining machine equipped with two separated heads for the curling and lining operations on the bottoms and the covers. The machine consists of a welded steel frame, on which are installed two workings heads:

- the first one makes the curling, by double rollers
- the second one applies the compound (if required), by spraying nozzle

MACHINE FACILITATION

- Easy access to the operating head
- No machine cleaning is required in case of production stoppages
- Reduced and simplified machine maintenance
- No need for compound pre-heating
- Reduced overall dimensions being the two working heads located on a single machine frame

A motorized entry conveyor belt keeps a constant bottoms feeding flow. The working sequence is guaranteed by a pneumatic control system assisted by a bottom detecting device. The machine can be provided with an end-stacker or a pusher into the compound drying oven.